

ELECTRIC STRIKES



F2 SERIES

Features:

- Fail Secure
- 3 hour fire rating
- Wood, metal, aluminum frames
- Modular design allows compatibility with most locks - no special faceplates required
- Accommodates up to 3/4" latch projection
- 12/24 DC/AC

RCF2164-630



RIM STRIKE Commercial grade 2

Features:

- Fail Secure
- 1 3/4" x 9"
- Wood / Metal / Aluminum Frames
- Accommodates 1/2" to 3/4"
- Works with most manufacturer's exit devices
- 24VAC/DC

RC0161-08-32D



Rim Device Strike

Features:

- Compatible with most major manufacturers
- Stainless steel
- Dual voltage for flexibility in the field, plug-in wire connectors up to 1/4" horizontal adjustment

RC0162-32D 3/4"

RC0563-32D 1/2"




Economy Strikes Light Duty Offset & Centerline Latch Entry

Features:

- 3/8" Latch Projection
- 1 1/4" x 5 3/8"
- Fail Secure
- For hollow metal, aluminum or wood frames

RC15BS-01-26D Brushed Chrome

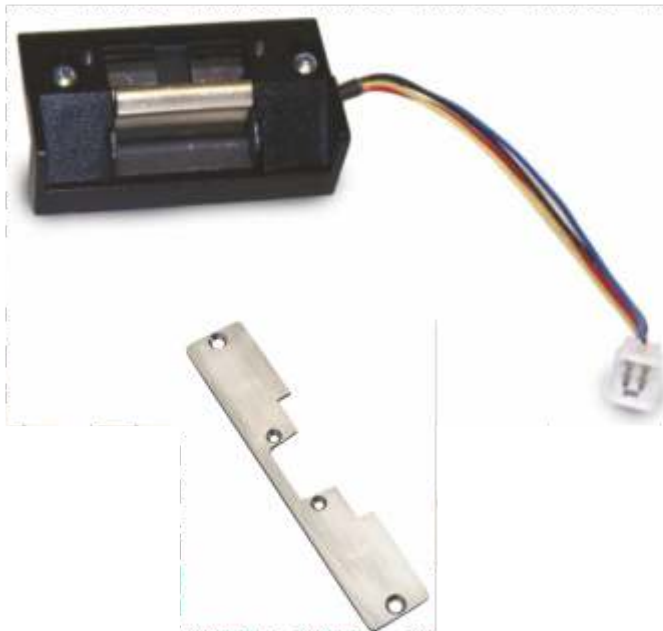

"All-in-one" 6 Series Electric Strike

Features:

- Field selectable fail safe or secure with the turn of a dial (Fail unlocked requires DC)
- Field selectable voltage 12 or 24VDC and 12 to 24VAC (even 16VAC)
- Low profile version is shallow enough for use with narrow stile aluminum frames (only 1 3/16" deep)
- Horizontal adjustability (up to 1/8")
- Modular "plug-in" wire connectors for fast hook-up
- Modular faceplate designs for a variety of frame types and cut outs
- L6514 Low Profile version 3/8" latch projection
- S6514 Standard version 3/4" latch projection

RCAL65 Low Profile Strike Less Faceplate

RCAS65 Standard Profile Strike Less Faceplate

Faceplate Options

1 1/4" x 4 7/8" Round Corner

RCB6-04-32D

1 1/4" x 4 7/8" Square Corner

RCB6-14-32D

1 1/4" x 6 7/8" Round Corner

RCB6-07-32D

1 3/8" x 7 15/16" Round Corner

RCB6-08-32D

7 SERIES

MODEL #7104

Commercial Grade 3, use w/aluminum frames



Features:

- Face Plate - 1 1/4" x 4 3/8"
- Keeper Depth - 5/8"
- Case Depth - 1 1/2"
- Fail Locked

RC7104-01-32D	11-16VAC
RC7104-05D-32D	12VDC
RC7104-07-32D	24VAC
RC7104-08D-32D	24VDC

MODEL #7108

Commercial Grade 3, use w/alum. or wood frames



Features:

- Face Plate - 1 7/16" x 7 9/16"
- Keeper Depth - 5/8"
- Case Depth - 1 1/2"
- Fail Locked

RC7108-01-32D	11-16VAC
RC7108-05D-32D	12VDC
RC7108-08D-32D	24VDC

MODEL #7114

Commercial Grade 3, use with hollow metal frames



Features:

- Face Plate - 1 1/4" x 4 3/8"
- Keeper Depth - 5/8"
- Case Depth - 1 1/2"
- Fail Locked

RC7114-01-32D	11-16VAC
RC7114-05D-32D	12VDC
RC7114-07-32D	24VAC
RC7114-08D-32D	24VDC

RC12C-06-32D	COMPACT STRIKE 12VDC
RCA71-12VDC	71 SERIES WITHOUT FACEPLATE
RCA71-16VAC	71 SERIES WITHOUT FACEPLATE
RCA71-24VDC	71 SERIES WITHOUT FACEPLATE



CABINET LOCKS

3 Series Commercial Grade

Features:

- Self-adjusting alignment tabs
- Side or top mounting capabilities
- Four countersunk mounting holes



RC3513	12/24DC Black Finish
RC3513DM	Dual Monitoring

ACCESSORIES

TRANSFORMERS

RCRT1002	12AC
RCRT1008	24AC



POWER SUPPLY

RT1003



Batteries & Timer For 10-5 Power Supply

FEATURES:

- 2 momentary or latching relays to control devices
- Large alphanumeric backlit LCD display
- EEPROM Memory for safe storage of data (all data is stored in the event of a power failure)
- 40 programmable holidays
- 99 Daily/Weekly events
- Automatic Voltage 12 to 24 VAC or DC
- Built in battery charger circuit

RC RT1003 Plug-in 12DC 1.5 Amp

SWITCHES

909 Series Rocket Switch



Features:

- Momentary Rocker Switch, SPDT
- 10 amp @ 250 Volt
- 2 3/8" x 2 3/4" x 9/16"
- Surface Mounted

RC909-MO

980 Series Push Button Switch



Features:

- Face Plate - 2 3/8" x 4 1/2"
- Momentary SPDT
- 4 amp @ 250 Volt

RC980-MO-32D

960 Series Key Switch



NOTE: Cylinder Not Included

Features:

- Face Plate: 960 - 3" x 4 3/4"
- 960N - 1 5/8" x 4 3/4"
- 5 amp @ 120 Volt.
- LED (Red/Green) Mounted in Plate

RC960-MA-LED-28 Maintained SPDT- ON/OFF

RC960-MO-LED-28 Momentary SPDT- NO & NC

LOOPS

Flex Loop

FEATURES:

- Surface Mounted
- Stainless Steel cable
- Plastic end caps
- 9507- Accepts up to 4 conductor @ 22 ga. or 2 conductor @ 18 ga
- 9508- Accepts up to 16 conductor @ 22 ga. or 8 conductor @ 18 ga



- RC9507-12B 12" Brown
- RC9507-12S 12" Silver
- RC9507-18B 18" Brown
- RC9507-18S 18" Silver
- RC9507-7S 7" Silver
- RC9509-18S 18" Silver

EXIT DEVICES

High Security Exit Devices

FEATURES:

- Interlocking latch and strike grip completely encased within the mechanism
- Virtually impossible to pry or force open
- Gentle push on the exit bar releases the latch



RC1200C-36"-28 Cyl. Dogging Alum

PUSH BUTTON

Illuminated Pushbutton

Features:

- SPDT momentary switch illuminated by your choice of incandescent or LED bulbs in 12V and 24V
- Mounts on a stainless steel single gang faceplate



RC972-L-ES-MO

MAGNETS

8310 MultiMag

For Single Outswinging Interior or Perimeter Doors



- Features:**
- Adjustable keyhole mounting
 - Convenient plug-in wiring terminals
 - Built-in delayed relock feature (0-110 seconds)
 - Field selectable voltage 12/24VDC
 - Up to 1500 lbs. (680 kg.) holding force
 - Easy-access wiring cavity
 - Stabilizing 4-bolt "Drop-Stop" mounting
 - Low-voltage detection
 - Self-drilling tek™ fasteners
 - MOV surge protection
 - 1 3/4"D x 2 3/4"W x 10 1/2"L

RC8310-28
RC8310-28-SCS

8320 MultiMag

For Double Outswinging Interior or Perimeter Doors



RC8320-28

- Features:**
- Adjustable keyhole 8-bolt "Drop-Stop" mounting
 - Convenient plug-in wiring terminals
 - Field selectable voltage 12/24VDC
 - 1500 lbs. holding force ea. electromagnet
 - Easy-access wiring cavity
 - Self-drilling tek™ fasteners
 - MOV surge protection
 - 1 3/4"D x 2 3/4"W x 21"L

8371 Surface MiniMag

For Single Outswinging Interior Doors



- Features:**
- Low-profile design
 - Field-selectable voltage 12/24VDC
 - Up to 750 lbs. (340kg.) holding force
 - No residual magnetism
 - Hardened steel armature nut
 - 1"D x 1 1/2"W x 9 3/4"L

RC8371-28
RC8371-28-SCS

8375 Surface MicroMag

For Swinging Doors on Small Enclosures



- Features:**
- Up to 300 lbs. (136kg.) holding force
 - Low energy consumption
 - Field-selectable voltage 12/24VDC
 - MOV surge protection
 - Hardened steel armature nut
 - 3/8"D x 1 1/2"W x 6 3/8"L

RC8375-28

8380 GateMag

For Single or Double Swinging or Sliding Interior or Exterior Gates



RC8380-32D

- Features:**
- No residual magnetism
 - Weather-resistant
 - Stainless steel housing
 - Versatile face or bottom mounting
 - Built-in RLS (Remote Lock Status)
 - Field-selectable voltage - 12/24VDC
 - 6 1/2' (1.9 meters) wire cable
 - Up to 1500 lbs. (680kg.) holding force
 - Conduit fitting inside diameter 1/2"
 - Conduit fitting outside diameter 3/4"
 - MOV surge protection
 - Low energy consumption
 - 1 3/4"D x 2 1/2"W x 8 3/4"L

DE8310 Delayed Egress

For Single Outswinging Perimeter Doors




RCDE8310-28
RCDE8310S-28

- Features:**
- Field selectable 15 or 30 second release delay with field selectable 0 to 3 second nuisance delay
 - Highly visible "Red/Green" light panel indicates status of door (local)
 - Includes 960 Keyswitch for reset and override, 15 second Building Code Sign; base unit includes external sounder
 - Built-in Security Condition Sensor (SCS) feature indicates that the door is closed and bonded
 - Dry contact relay switching (SPDT and DPDT) provided for local and/or remote monitoring
 - Auto sensing voltage from 12 to 30 VDC
 - Up to 1200lbs (540kg) holding force

Angle Bracket

For 8310



- Features:**
- Dimensions: 1" x 1" x 10 1/2"
- RCAB-01-28

Top Jamb Z Bracket



RCTJ71-28 For 8371
RCTJ75-28 For 8375

Top Jamb Z Bracket



RCTJ80-28 For 8380

LEGEND

SCS	Security Condition Sensor
------------	---------------------------

LSS	Lock Status Sensor
------------	--------------------